



STPXXXS - D60/Wmh



580-600W      21.2%



21.2%



2%




2400

5400

\*



\*\*

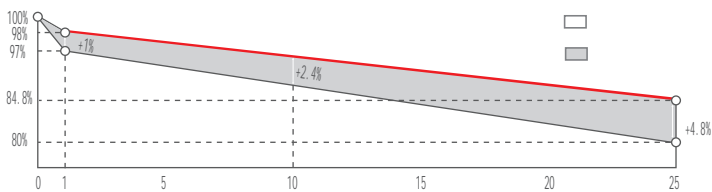

IEC 61730  
 IEC 61215


ISO 9001  
 ISO 14001  
 ISO 45001





STPXXXS - D60/Wmh 580-600W

120 (6 × 20)

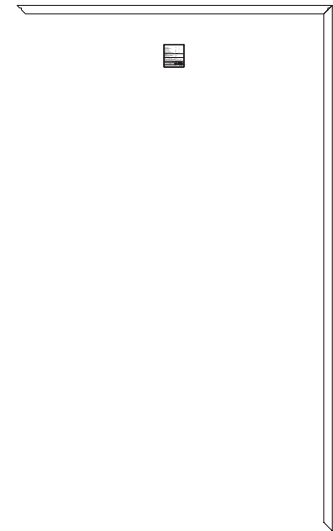

STP-XC4

IP68

-40 ° C - +85 ° C

1500 V DC (IEC)

30 A

0/+5 W

	STP600S-D60/Wmh		STP595S-D60/Wmh		STP590S-D60/Wmh		STP585S-D60/Wmh		STP580S-D60/Wmh	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
(Pmax/W)	600	452.5	595	448.9	590	445.0	585	441.4	580	437.5
(Vmp/V)	34.65	32.4	34.45	32.2	34.25	32.0	34.05	31.9	33.85	31.7
	17.32	13.97	17.28	13.94	17.23	13.89	17.19	13.86	17.14	13.81
	41.85	39.4	41.65	39.2	41.45	39.1	41.25	38.9	41.05	38.7
	18.31	14.73	18.27	14.70	18.22	14.66	18.18	14.63	18.13	14.59
	21.2		21.0		20.8		20.7		20.5	

2

2

Pmax +/- 3%

(600S)

42 ± 2 ° C

-0.34%/° C

-0.26%/° C

0.050%/° C

