


Ultra S mini

HALF-CELL MONOFACIAL MODULE

TYPE: STPXXXS - B60/Wnhb

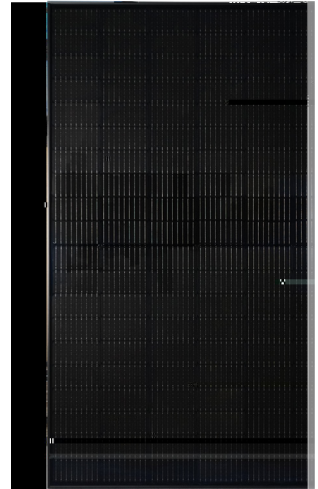

POWER OUTPUT MAX EFFICIENCY
360-380W **20.8%**

Features



High module conversion efficiency
 Module efficiency up to **20.8%** achieved through advanced cell technology and manufacturing process



Lower operating temperature
 Lower operating temperature and temperature coefficient increases the power output



Suntech current sorting process
 Up to **2%** power loss caused by current mismatch could be diminished by current sorting technique to maximize system power output



Extended wind and snow load tests
 Module certified to withstand extreme wind (3800 Pascal) and snow loads (5400 Pascal) *




Excellent weak light performance
 More power output in weak light condition, such as cloudy, morning and sunset



Withstanding harsh environment
 Reliable quality leads to a better sustainability even in harsh environment like desert, farm and coastline

Industry-leading Warranty **

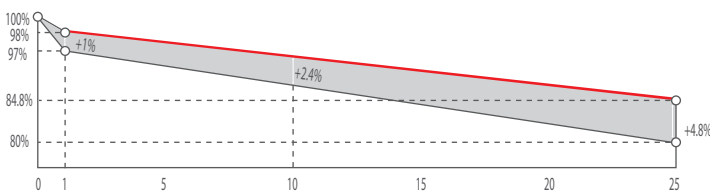

First year power degradation: 2%
 Annual degradation: 0.55%

Product warranty: 12 years
 linear warranty: 25 years

Certifications and Standards

Social Responsibility Standards
 Quality Management System
 Environment Management System

Guideline for module design qualification and type approval



* Please refer to Suntech Standard Module Installation Manual for details.
 ** Please refer to Suntech Limited Warranty for details.

*** WEEE only for EU market.
 **** Suntech reserves the right to the final interpretation of the warranty by Munich Re.



STPXXXS - B60/Wnhb 360-380W

Mechanical Characteristics

Solar Cell	Monocrystalline silicon 166 mm
No. of Cells	120 (6 × 20)
Dimensions	1756 × 1039 × 35 mm (69.1 × 40.9 × 1.4 inches)
Weight	20.3 kgs (44.8 lbs.)
Front Glass	3.2 mm (0.126 inches) fully tempered glass
Output Cables	4.0 mm ² , (-) 350 mm (+) 160 mm in length or customized length
Junction Box	IP68 rated (3 bypass diodes)
Operating Module Temperature	-40 °C to +85 °C
Maximum System Voltage	1000 / 1500 V DC (IEC)
Maximum Series Fuse Rating	20 A
Power Tolerance	0/+5 W

Electrical Characteristics

Module Type	STP380S-B60/Wnhb		STP375S-B60/Wnhb		STP370S-B60/Wnhb		STP365S-B60/Wnhb		STP360S-B60/Wnhb	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax/W)	380	286.3	375	281.9	370	278.2	365	274.3	360	270.7
Optimum Operating Voltage (Vmp/V)	34.7	32.2	34.5	32.2	34.3	32.0	34.1	31.8	33.9	31.6
Optimum Operating Current (Imp/A)	10.96	8.92	10.87	8.76	10.79	8.69	10.71	8.62	10.62	8.56
Open Circuit Voltage (Voc/V)	41.3	38.9	41.1	38.9	40.9	38.7	40.7	38.5	40.5	38.4
Short Circuit Current (Isc/A)	11.64	9.39	11.57	9.24	11.49	9.17	11.42	9.10	11.35	9.04
Module Efficiency (%)	20.8		20.6		20.3		20.0		19.7	

STC: Irradiance 1000 W/m², module temperature 25 °C, AM=1.5; NMOT: Irradiance 800 W/m², ambient temperature 20 °C, AM=1.5, wind speed 1 m/s; Tolerance of Pmax is within +/- 3%;

Temperature Characteristics


Nominal Module Operating Temperature (NMOT)	42 ± 2 °C
Temperature Coefficient of Pmax	-0.36%/°C
Temperature Coefficient of Voc	-0.304%/°C
Temperature Coefficient of Isc	0.050%/°C

Packing Configuration

Container	20 'GP	40 'HC
Pieces per pallet	31	31
Pallets per container	6	26
Pieces per container	186	806
Packaging box dimensions	1786×1130×1203 mm	
Packaging box weight	679 kg	

Graphs

Current-Voltage & Power-Voltage Curve (380S)

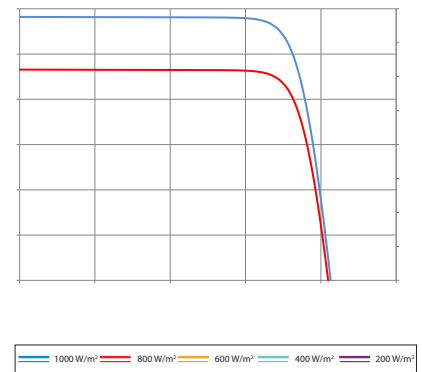

Information on how to install and operate this product is available in the installation instruction. All values indicated in this data sheet are subject to change without prior announcement. The specifications may vary slightly. All specifications are in accordance with standard EN 50380. Color differences of the modules relative to the figures as well as discolorations of/in the modules which do not impair their proper functioning are possible and do not constitute a deviation from the specification.