


# HALF-CELL BIFACIAL MODULE

TYPE: STPXXXS - D60/Pmh+

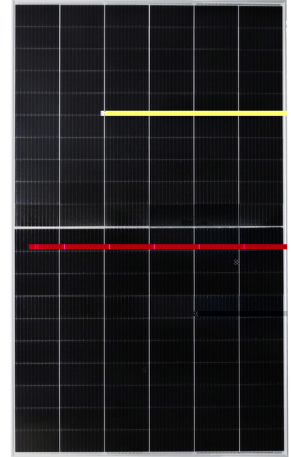

POWER OUTPUT

**580-600W**

MAX EFFICIENCY

**21.2%**

## Features



### High module conversion efficiency

Module efficiency up to **21.2%** achieved through advanced cell technology and manufacturing process



### Lower operating temperature

Lower operating temperature and temperature coefficient increases the power output



### Suntech current sorting process

Up to **2%** power loss caused by current mismatch could be diminished by current sorting technique to maximize system power output



### Extended wind and snow load tests

Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal) \*



### Excellent weak light performance


More power output in weak light condition, such as cloudy, morning and sunset



### Withstanding harsh environment

Reliable quality leads to a better sustainability even in harsh environment like desert, farm and coastline

## Industry-leading Warranty \*\*

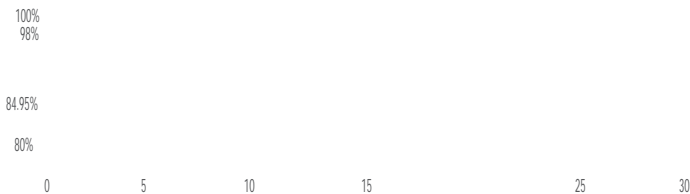

## Certifications and Standards

Social Responsibility Standards  
 Quality Management System  
 Environment Management System  
 Guideline for module design  
 qualification and type approval





## STPXXXS - D60/Pmh+ 580-600W

### Mechanical Characteristics

Solar Cell	Monocrystalline silicon 210 mm
No. of Cells	120 (6 × 20)
Dimensions	2172 × 1303 × 35 mm (85.5 × 51.3 × 1.4 inches)
Weight	37.1 kgs (81.8 lbs.)
Front \ Back Glass	2.0+2.0 mm (0.079+ 0.079inches) semi-tempered glass
Output Cables	4.0 mm <sup>2</sup> , (-) 350 mm and (+) 160 mm in length or customized length
Junction Box	IP68 rated (3 bypass diodes)
Operating Module Temperature	-40 °C to +85 °C
Maximum System Voltage	1500 V DC (IEC)
Maximum Series Fuse Rating	30 A
Power Tolerance	0/+5 W
Refer. Bifaciality Factor	(70 ± 5)%
Packing Configuration	Packaging box dimensions (mm) : 1325×1120×2298 Packaging box weight (kg) : 1188 31 Pieces per pallet 558 Pieces per container / 40 'HC

For tracker installation, please turn to Suntech for mechanical load information.

### Electrical Characteristics

Module Type	STP600S-D60/Pmh+		STP595S-D60/Pmh+		STP590S-D60/Pmh+		STP585S-D60/Pmh+		STP580S-D60/Pmh+	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax/W)	600	452.5	595	448.9	590	445.0	585	441.4	580	437.5
Optimum Operating Voltage (Vmp/V)	34.65	32.4	34.45	32.2	34.25	32.0	34.05	31.9	33.85	31.7
Optimum Operating Current (Imp/A)	17.32	13.97	17.28	13.94	17.23	13.89	17.19	13.86	17.14	13.81
Open Circuit Voltage (Voc/V)	41.85	39.4	41.65	39.2	41.45	39.1	41.25	38.9	41.05	38.7
Short Circuit Current (Isc/A)	18.31	14.73	18.27	14.7	18.22	14.66	18.18	14.63	18.13	14.59
Module Efficiency (%)	21.2		21.0		20.8		20.7		20.5	

STC: Irradiance 1000 W/m<sup>2</sup>, module temperature 25 °C, AM=1.5; NMOT: Irradiance 800 W/m<sup>2</sup>, ambient temperature 20 °C, AM=1.5, wind speed 1 m/s; Tolerance of Pmax is within +/- 3%;

### Different Rearside Power Gain Reference to 590S Front

Rearside Power Gain	5%	15%	25%
Maximum Power at STC (Pmax)	619.5	678.5	737.5
Optimum Operating Voltage (Vmp/V)	34.25	34.25	34.35
Optimum Operating Current (Imp/A)	18.09	19.81	21.54
Open Circuit Voltage (Voc/V)	41.5	41.5	41.6
Short Circuit Current (Isc/A)	19.13	20.95	22.78
Module Efficiency (%)	21.9	24.0	26.1

### Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42 ± 2 °C
Temperature Coefficient of Pmax	-0.34%/°C
Temperature Coefficient of Voc	-0.26%/°C
Temperature Coefficient of Isc	0.050%/°C

Information on how to install and operate this product is available in the installation instruction. All values indicated in this data sheet are subject to change without prior announcement. The specifications may vary slightly. All specifications are in accordance with standard EN 50380. Color differences of the modules relative to the figures as well as discolorations of/in the modules which do not impair their proper functioning are possible and do not constitute a deviation from the specification.

### Graphs Current-Voltage & Power-Voltage (600S)

