

Ultra X Mono

HALF-CELL MONOFACIAL MODULE

TYPE: STPXXXS - D60/Wmh



POWER OUTPUT

580-600W

MAX EFFICIENCY

21.2%

Features



High module conversion efficiency

Module efficiency up to **21.2%** achieved through advanced cell technology and manufacturing process



Lower operating temperature

Lower operating temperature and temperature coefficient increases the power output



Suntech current sorting process

Up to **2%** power loss caused by current mismatch could be diminished by current sorting technique to maximize system power output



Extended wind and snow load tests

Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal) *



Excellent weak light performance


More power output in weak light condition, such as cloudy, morning and sunset



Withstanding harsh environment

Reliable quality leads to a better sustainability even in harsh environment like desert, farm and coastline

Industry-leading Warranty **

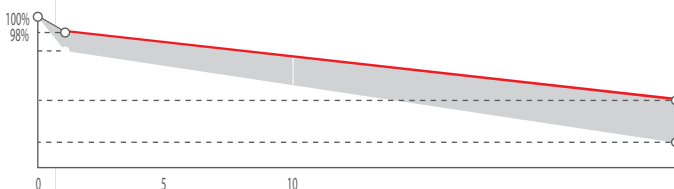

First year power degradation: 2%

Annual degradation: 0.55%

Product warranty: 12 years

linear warranty: 25 years

Certifications and Standards

Social Responsibility Standards
Quality Management System
Environment Management System

Guideline for module design
qualification and type approval



* Please refer to Suntech Standard Module Installation Manual for details.
** Please refer to Suntech Limited Warranty for details.

*** WEEE only for EU market.
**** Suntech reserves the right to the final interpretation of the warranty by Munich Re.

